


# The Counseling Center

Project Location:    Wooster, Ohio

Project Date:        1999

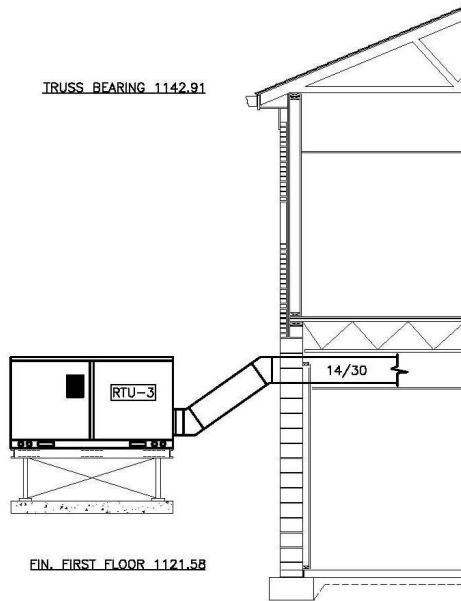

RTU-3 SUPPORT ELEVATION



## Project Description:

A two (2) story addition of approximately 12,000 square feet was added to the existing Counseling Center. The addition consisted of office space and meeting rooms of various sizes as well as a staff kitchen and break room.

In addition to the typical plumbing fixtures for a medical office environment, the staff kitchen required a hand sink, a prep sink, a pre-rinse sink with a waste disposer, a dishwasher, and a 1000 gallon grease interceptor.

The HVAC system was comprised primarily of exterior ground mounted packaged gas/electric units ducted to the interior zones. In addition, the staff kitchen required a Type II grease hood and grease fan on the roof.